



Quick Installation Guide 4/8/16 Channel DVR

1 Connecting a Video Display


This DVR supports 3 types of video output interfaces, including VGA, HDMI and BNC. Connect any one of them for a video display.

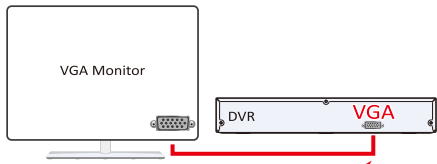

Plug a VGA cable from VGA monitor into the port marked "VGA" on the back of the DVR.

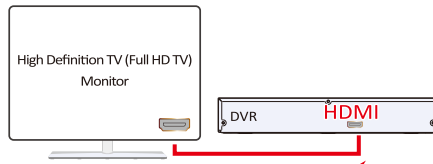

Plug a HDMI cable from High Definition TV/Monitor into the port marked "HDMI" on the back of the DVR.

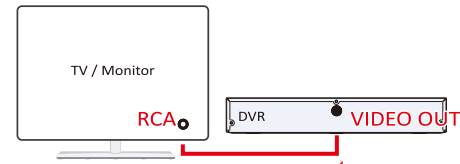


Plug a BNC-to-RCA cable (RCA) to the "VIDEO IN" port on the back of the TV/Monitor. Plug the other end (BNC) to the "VIDEO OUT" port on the back of the DVR.

2 Connecting Cameras


Step 1.

Connect the BNC / Power from the camera to the matching connector on the 18-meter slim cable.

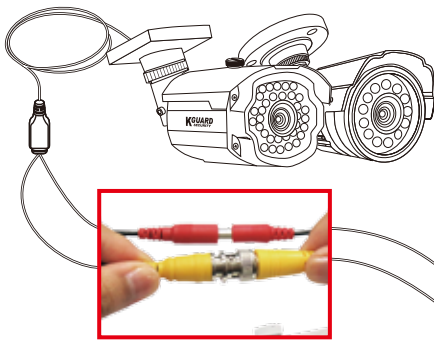


Step 2.

Connect the BNC connector on the 18-meter slim cable to any of the "Video In" ports on the back of the DVR.

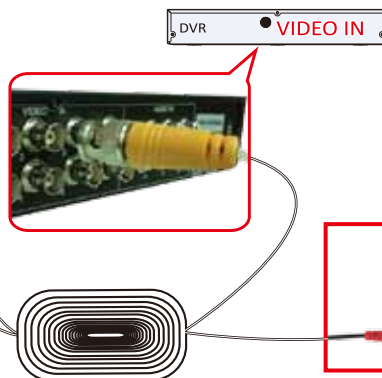

Step 3.

Plug one of the power leads on the power splitter into the power lead on the 18-meter slim cable. Connect the single end of the power splitter to the power adapter. Or if you are connecting only a single camera, connect the power lead to the power adapter directly.

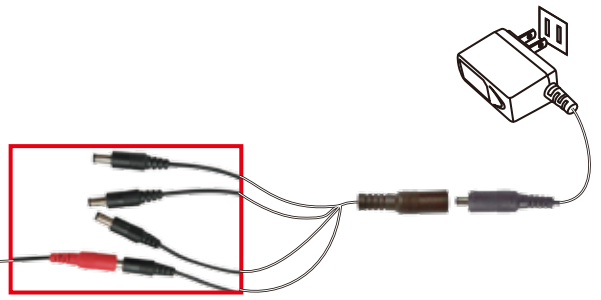

3 Plug USB Mouse into DVR

Connect a USB mouse to the USB port on the back of the DVR for DVR control.



4 Power on DVR

Plug in the DVR to power up.



STARTUP WIZARD

The Startup Wizard will guide you through the important settings of using this DVR.

To skip and disable Startup Wizard, check the checkbox and click Cancel.






Safety Precautions:
Do Not touch or remove electrical parts, wires and HDD during operation.



EASY SETUP FOR REMOTE LIVE VIEW

Scenario 1: Connecting via Mobile / Pad

1. Open the App Store (iOS) or Play Store (Android).
2. Search for and install KviewQR application.
3. Open KviewQR application () and tap  (iOS) or tap  (Android) to add a DVR.



4. Tap Scan to scan the QR code sticker on the top of the DVR. Or manually enter the 20-symbol QR code as shown on sticker.
5. Enter the password and change the DVR name (if necessary). After all settings are complete, tap OK.

Default User Name : admin


Default Password : 123456

6. Live View



Scenario 2: Connecting via IE Browser (IE8 or above)

1. Go to <http://www.mykguard.com>
 2. Fill in DVR ID & Password to Quick Login
- ※ You are able to find out the DVR ID & Password from the label on DVR

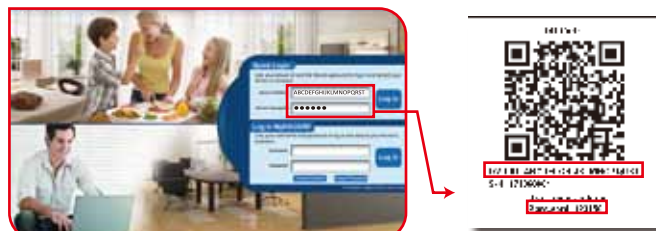


3. Click on "Skip" to live view




Cloud

1. Main Menu  > Advance > COMM > Cloud

2. Type Receiver address.

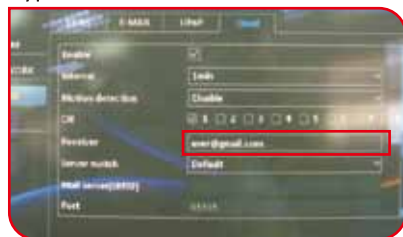


3. Click Activate Cloud.

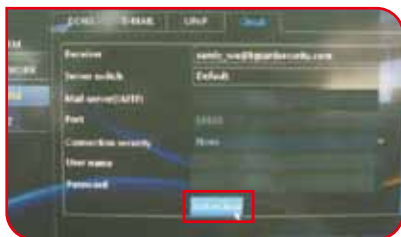


- 4-1. Scan QR Code on screen to activate Cloud.



- 4-2. Or, check mail box within 3 minutes to activate Cloud.

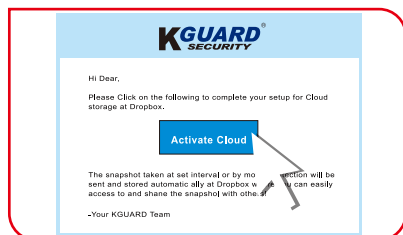

5. Success!

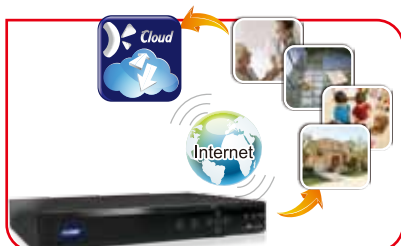

※ Or create a new device name and click on "Confirm" to register your own device name when login next time.

Do you have any problem with setup? KGUARD will help you.

1. Read the User Manual on the CD in the pack
2. Visit KGUARD website. www.kguardsecurity.com for FAQs
3. Email or Skype our Technical Support Team:
E-Mail: support@kguardsecurity.com
Skype Account: KguardSupport



KG-AURORA-EN-GL-A01

* For more information on DVR, please refer to user manual.